




CORVULCA®

anciennement DAUBIÉ et Cie

MODULAR SYSTEME SP 97®


CORETANE - ARMACOR

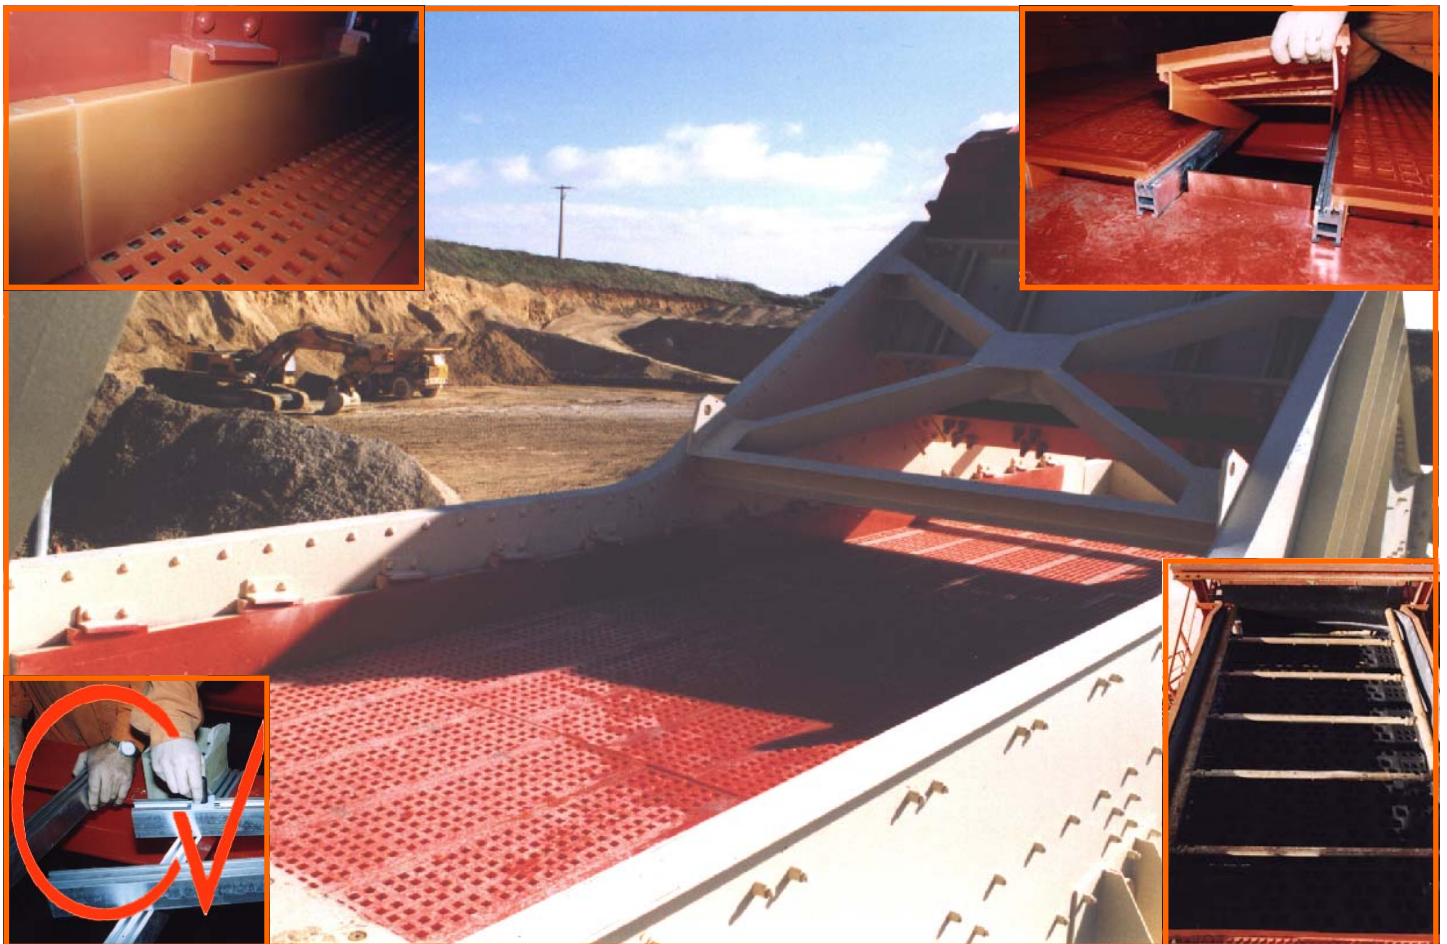

THE GOOD CHOICE!


MODULAR SYSTEME SP 97[®]

DESCRIPTIVE :

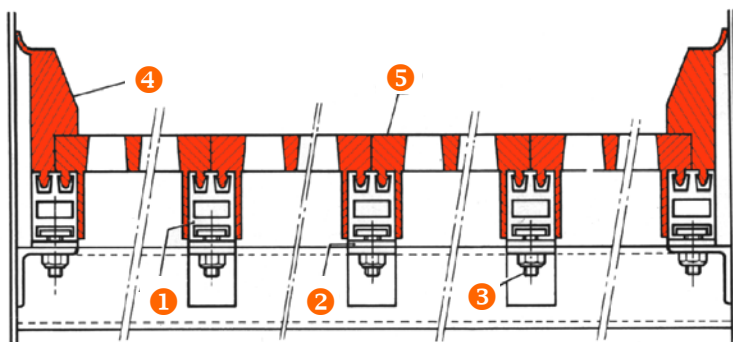


Cross section of screen


- ① SP beam light alloy self supporting channel
- ② Clamping spacer
- ③ Forged steel bolt TM 16 x 60
- ④ CORETANE[®] wested side protection panel with lateral scaling lip
- ⑤ Standard module SP 97[®]

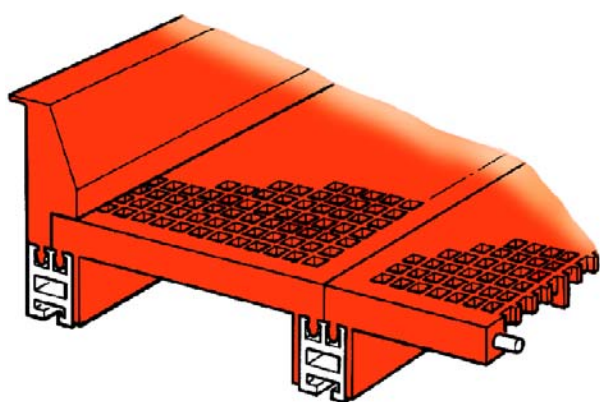

Standard module with lateral wested protection

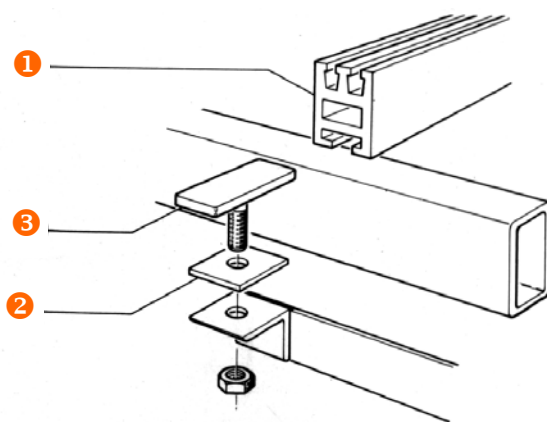

Fixing of channel section on screen crossbeam SP

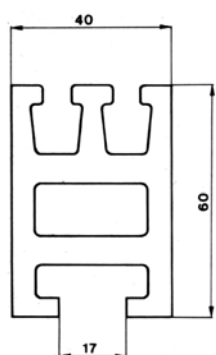

Light alloy channel section SP


- Use a light alloy channel section showing high mechanic amical stability allows to reduc considerably the total weight of the chassis with respect to steel.

The all light alloy channel section is fixed by forged stell TM bolts, this providing efficient protection against wear

- **The dual grooves of the SP channel section** provide independent nesting easy replacement of the element.


The grooves also insure perfect connection.

The lateral protections nested or locked insure the exterior fixation of the modules.

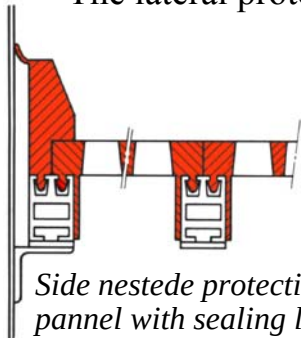

Side nestede protection pannel with sealing lip

CORVULCA can also provide bolted side protection pannels.

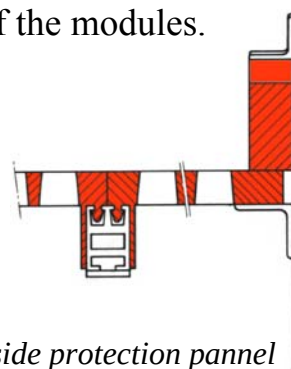

Locked side protection pannel



Light alloy SP chanel bolted on the sreen

Each CORETANE SP 97 module is fitted with two flaps providing total protection of the light alloy channel section SP against material abrasion.

According to the use, the modules are built with CORETANE polyurethan mono or, double hardness, or ARMACOR rubber.



View of the module's end part

The SP 97[®] modular system is totally standardized and the lenght of 1000 mm is the most common.

Nevertheless CORVULCA can provide modules to 1300 mm length.

The standard width of 293 mm accomodates a maximum number number of standard elements.

To allow a staggered mounting and perfect matching to the screen width,
it is recommended to use side pannels with following standard widths :
150, 175, 225, 250, 300, 320 et 370 mm



Fitting



Removal

The SP 97[®] modules are nested using a hammer.

One need only to separate a module at end with a screwdriver and pull it upwards.



*Suitable light alloy channel
TYPE I
(40 x 25,5 mm)*

**The SP 97[®] modular system
is perfectly suitable of existing frames.**

Right and left see some samples of.




*Suitable light alloy channel
TYPE II
(40 x 25, 5 mm)*

CORVULCA provides a complete range of screen mat suitable for every design of screen...



Stretched screen mat ST or panels SB
build with polyurethane CORETANE
or with ARMACOR abrasion resistant rubber

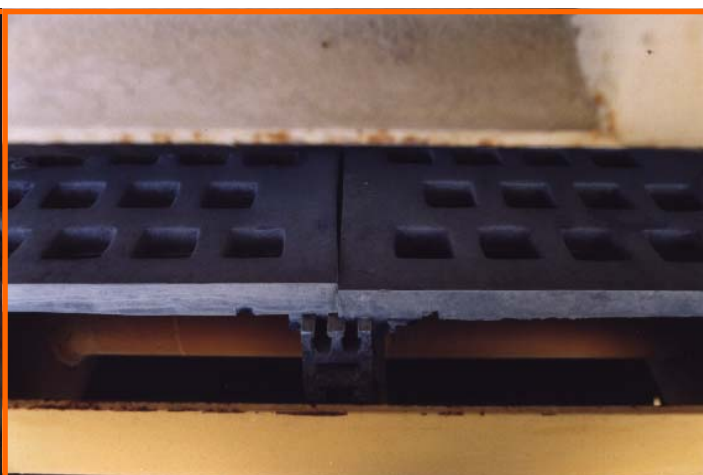

Drying pannels manufactured in SB type and SP 97[®] modular system

⇒ FITTING ACCESSORIES :

- Caping rubber
- Medial fixing bar
- Nested or bolted protection
- Cloging down wreath
- Tighting cable
- fixing stud
- Deflectors to screw
- Mini water spray CORJET[®]



CORVULCA[®]

anciennement DAUBIÉ et Cie

ZAE - Chemin du Bac des Aubins
95820 BRUYERES SUR OISE
FRANCE

www.corvulca.fr

TELEPHONE : 33 (0)1 30 28 94 80
TELECOPIE : 33 (0)1 30 28 02 26
COURRIEL : contact@corvulca.fr